

AD-A277 219

ION PAGE

Form Approved
OBM No. 0704-0188Public use
maintain
for reduci
the Office1 per response, including the time for reviewing instructions, searching existing data sources, gathering and
Send comments regarding this burden or any other aspect of this collection of information, including suggestions
ation Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to
ashington, DC 20503.

1. Agency Use Only (Leave blank).

2. Report Date.
3 February 19943. Report Type and Dates Covered.
Contractor Report4. Title and Subtitle.
Penetrable Wedge Analysis5. Funding Numbers.
Contract N00014-93-1-6014
Program Element No. 0601153N
Project No.
Task No.
Accession No. DN257115
Work Unit No. 12212F6. Author(s).
Robert W. Scarstein*7. Performing Organization Name(s) and Address(es).
*The University of Alabama
Tuscaloosa, AL 35487-0286DTIC
ELECTE
MAR 22 1994
S B D8. Performing Organization
Report Number.9. Sponsoring/Monitoring Agency Name(s) and Address(es).
Naval Research Laboratory
Acoustic Simulation and Tactics Branch
Stennis Space Center, MS 39529-500410. Sponsoring/Monitoring Agency
Report Number.
NRL/CR/7181--94-0004

11. Supplementary Notes.

11/98

94-09018

12a. Distribution/Availability Statement.
Approved for public release; distribution is unlimited.

13. Abstract (Maximum 200 words).

The required inner products in the Galerkin solution of the integral equation, using a basis of exponential-weighted Laguerre polynomials, are expressed as series of algebraic forms. We are presently evaluating these series to get a feel for the invertibility of the integral equation (transformed to a system of linear equations), prior to any inclusion of the anticipated asymptotic behavior from the Sommerfeld half-space problem. If this unmodified system of the first kind inverts nicely, then its inverse can be used to express the boundary value problem as a system of the second kind; resulting in a whole new set of opportunities for iterative or perturbation series approaches.

14. Subject Terms.
Scattering, plane waves15. Number of Pages.
10

16. Price Code.

17. Security Classification
of Report.
Unclassified18. Security Classification
of This Page.
Unclassified19. Security Classification
of Abstract.
Unclassified20. Limitation of Abstract.
SAR

NSN 7540-01-280-5500

94 3 21 002

DTIC

01

Standard Form 298 (Rev. 2-89)
Prescribed by ANSI Std. Z39-18
298-102

Quarterly Progress Report Submitted to:
US Naval Research Laboratory - Stennis Space Center

PENETRABLE WEDGE ANALYSIS
GRANT NO. N00014-93-1-6014

ROBERT W. SCHARSTEIN, PRINCIPAL INVESTIGATOR
DEPARTMENT OF ELECTRICAL ENGINEERING

The University of Alabama
Tuscaloosa, Alabama 35487-0286
205-348-1761

3 February 1994

I. INTEGRAL EQUATION STATUS

The required inner products in the Galerkin solution of the integral equation, using a basis of exponential-weighted Laguerre polynomials, are expressed as series of algebraic forms. We are presently evaluating these series to get a feel for the invertibility of the integral equation (transformed to a system of linear equations), prior to any inclusion of the anticipated asymptotic behavior from the Sommerfeld half-space problem. If this unmodified system of the first kind inverts nicely, then its inverse can be used to express the boundary value problem as a system of the second kind; resulting in a whole new set of opportunities for iterative or perturbation series approaches.

There are several important issues to be addressed in connection with the far ($r \rightarrow \infty$) behavior:

- (1) The far behavior

$$\frac{\partial}{\partial y} \psi_1(x \rightarrow \infty, y \rightarrow 0) \sim \frac{k_1 a}{\sqrt{8\pi i k_1}} \frac{e^{ik_1 x}}{x^{3/2}}$$

is not the proper form close to the apex. An abrupt jump from the Laguerre series to this oscillatory function is likely to lead to numerical instabilities, which suggests that a scaling function that filters out its effect for small r could be useful.

- (2) Inclusion of this far behavior is complicated in context of the even/odd symmetry decomposition. One simplification, based on the same line of physical intuition used to insure uniqueness in these types of scattering problems, is to invoke a radiation condition inside the wedge material. That is, assume the wedge to be slightly lossy so that the effect of the image source (in the even or odd case) is negligible (in comparison with the original line source), which is the domain of the surface integral equation. Admittedly, this is only a conjecture at the present, and its utility remains to be tested via experiments (both analytical and numerical).

II. CONFERENCES, MEETINGS, PROPOSALS, AND PAPERS

- (1) We submitted an abstract titled "Single Surface Integral Equation for Penetrable Wedge Scattering" to the Acoustical Society of America Meeting to be held in Cambridge, MA during June 1994 (copy attached).
- (2) We will present a seminar on this research at the Electrical Engineering Department of the University of Mississippi on 3 March 1994. While in Oxford, we will also meet with acoustics researchers from the National Center for Physical Acoustics.
- (3) We submitted a proposal "Analytical and Asymptotic Diffraction Theory for Penetrable Rough Surfaces" to ONR through the DEPSCoR program to continue and extend this acoustic scattering research.
- (4) The wedge paper [62], which is a result of last year's grant and has been the basis for our present grant, has appeared in print (copy attached).

REFERENCES

1. A.D. Rawlins, *Diffraction by a Dielectric Wedge*, J. Inst. Maths Applies **19** (1977), 261-279.
2. S. Berntsen, *Diffraction of an Electric Polarized Wave by a Dielectric Wedge*, SIAM J. Appl. Math. **43** (1983), 186-211.
3. V. Rokhlin, *Solution of Acoustic Scattering Problems by Means of Second Kind Integral Equations*, Wave Motion **5** (1983), 257-272.
4. R.E. Kleinman and P.A. Martin, *On Single Integral Equations for the Transmission Problem of Acoustics*, SIAM J. Appl. Math. **48** (1988), 307-325.
5. K. Davey, *An Integral Approach to Electromagnetic Scattering off a Dielectric Wedge*, Electromagnetics **7** (1987), 167-183.
6. G.D. Maliuzhinets, *Excitation, Reflection and Emission of Surface Waves from a Wedge with Given Face Impedances*, Sov. Phys. Dokl. **3** (1958), 752-755.
7. W.E. Williams, *Diffraction of an E-polarized Plane Wave by an Imperfectly Conducting Wedge*, Proc. R. Soc. London Ser. A **252** (1959), 376-393.
8. T.B.A. Senior, *Diffraction by an Imperfectly Conducting Wedge*, Commun. Pure Appl. Math. **12** (1959), 337-372.
9. A.D. Pierce and W.J. Hadden, Jr., *Plane wave diffraction by a wedge with finite impedance*, J. Acoust. Soc. Am. **63** (1978), 17-27.
10. R. Tiberio, G. Pelosi, and G. Manara, *A Uniform GTD Formulation for the Diffraction by a Wedge with Impedance Faces*, IEEE Trans. Antennas Propagat. **33** (1985), 867-873.
11. K. Hongo and E. Nakajima, *Polynomial Approximation of Maliuzhinets' Function*, IEEE Trans. Antennas Propagat. **34** (1986), 942-947.
12. M.I. Herman, J.L. Volakis, and T.B.A. Senior, *Analytic Expressions for a Function Occurring in Diffraction Theory*, IEEE Trans. Antennas Propagat. **35** (1987), 1083-1086.
13. T. Griesser and C.A. Balanis, *Reflections, Diffractions, and Surface Waves for an Interior Impedance Wedge of Arbitrary Angle*, IEEE Trans. Antennas Propagat. **37** (1989), 927-935.
14. H. Uberall, *Radar Scattering from Imperfectly Conducting or Coated Perfectly Conducting Wedges and Cones*, Acta Physica Austriaca **22** (1966), 67-93.
15. T.S. Angell and R.E. Kleinman, *Scattering of Acoustic Waves by Impedance Surfaces*, Wave Phenomena: Modern Theory and Applications (C. Rogers and T.B. Moodie, eds.), Elsevier, Amsterdam, 1984, pp. 329-336.
16. J. Bach Andersen and V.V. Solodukhov, *Field Behavior Near a Dielectric Wedge*, IEEE Trans. Antennas Propagat. **26** (1978), 598-602.
17. S.Y. Kim, J.W. Ra, and S.Y. Shin, *Edge Diffraction by Dielectric Wedge of Arbitrary Angle*, Electronics Letters **19** (1983), 851-853.

18. P.V. Tret'yakov, *Integral Solutions of the Wave Equation and the Diffraction of an Arbitrary Acoustic Wave by a Wedge*, J. Appl. Maths Mechs **55** (1991), 201-205.
19. A.W. Glisson, *An Integral Equation for Electromagnetic Scattering from Homogeneous Dielectric Bodies*, IEEE Trans. Antennas Propagat. **32** (1984), 173-175.
20. E. Marx, *Integral Equation for Scattering by a Dielectric*, IEEE Trans. Antennas Propagat. **32** (1984), 166-172.
21. E. Marx, *Computed Fields Near the Edge of a Dielectric Wedge*, IEEE Trans. Antennas Propagat. **38** (1990), 1438-1442.
22. E. Marx, *Electromagnetic Scattering from a Dielectric Wedge and the Hypersingular Integral Equation*, IEEE Trans. Antennas Propagat. (1992) (submitted).
23. S.Y. Kim, J.W. Ra, and S.Y. Shin, *Diffraction by an Arbitrary-Angled Dielectric Wedge: Part I-Physical Optics Approximation*, IEEE Trans. Antennas Propagat. **39** (1991), 1272-1281.
24. ———, *Part II-Correction to Physical Optics Solution*, IEEE Trans. Antennas Propagat. **39** (1991), 1282-1292.
25. H.H. Syed and J.L. Volakis, *Equivalent Current Formulation for an Impedance Wedge of Arbitrary Included Angle*, IEEE-APS Symposium Digest (Chicago) (1992), 1857-1860.
26. H.H. Syed and J.L. Volakis, *An Approximate Skew Incidence Diffraction Coefficient for an Impedance Wedge*, Electromagnetics **12** (1992), 33-55.
27. C. Bergljung and L.G. Olsson, *A Comparison of Solutions to the Problem of Diffraction of a Plane Wave by a Dielectric Wedge*, IEEE-APS Symposium Digest (Chicago) (1992), 1861-1864.
28. E. Marx, *The Hypersingular Integral Equation and the Dielectric Wedge*, IEEE-APS Symposium Digest (Chicago) (1992), 1865-1868.
29. L.B. Felsen, *Diffraction of the Pulsed Field from an Arbitrarily Oriented Electric or Magnetic Dipole by a Perfectly Conducting Wedge*, SIAM J. Appl. Math. **26** (1974), 306-312.
30. J.B. Keller and A. Blank, *Diffraction and Reflection of Pulses by Wedges and Corners*, Commun. Pure Appl. Math. **IV** (1951), 75-94.
31. T.W. Veruttipong, *Time Domain Version of the Uniform GTD*, IEEE Trans. Antennas Propagat. **38** (1990), 1757-1764.
32. J.M. Arnold and L.B. Felsen, *Rays and local modes in a wedge-shaped ocean*, J. Acoust. Soc. Am. **73** (1983), 1105-1119.
33. A. Kamel and L.B. Felsen, *Spectral theory of sound propagation in an ocean channel with weakly sloping bottom*, J. Acoust. Soc. Am. **73** (1983), 1120-1130.
34. J.M. Arnold and L.B. Felsen, *Intrinsic modes in a nonseparable ocean waveguide*, J. Acoust. Soc. Am. **76** (1984), 850-860.
35. J.M. Arnold and L.B. Felsen, *Coupled mode theory of intrinsic modes in a wedge*, J. Acoust. Soc. Am. **79** (1986), 31-40.
36. A.P. Ansbros and J.M. Arnold, *Calculation of the Green's function for the wedge-shaped layer*, J. Acoust. Soc. Am. **90** (1991), 1539-1546.
37. J.M. Dunn, *Lateral Wave Propagation in a Wedge Shaped Region*, IEEE Trans. Antennas Propagat. **35** (1987), 947-955.
38. M.A. Biot and I. Tolstoy, *Formulation of wave propagation in infinite media by normal coordinates with an application to diffraction*, J. Acoust. Soc. Am. **29** (1957), 381-391.
39. I. Tolstoy, *Diffraction by a Hard Truncated Wedge and a Strip*, IEEE Trans. Oceanic Eng. **14** (1989), 4-16.
40. I. Tolstoy, *Exact, explicit solutions for diffraction by hard sound barriers and seamounts*, J. Acoust. Soc. Am. **85** (1989), 661-669.
41. R.S. Keiffer and J.C. Novarini, *A Wedge Assemblage Method for 3-D Acoustic Scattering from Sea Surfaces: Comparison with a Helmholtz-Kirchhoff Method*, Computational Acoustics - Volume 1 (D. Lee, A. Cakmak, and R. Vichnevetsky, eds.), Elsevier, Amsterdam, 1990, pp. 67-81.
42. H. Medwin, *Shadowing by finite noise barriers*, J. Acoust. Soc. Am. **69** (1981), 1060-1064.
43. A.I. Papadopoulos and C.G. Don, *A study of barrier attenuation by using acoustic pulses*, J. Acoust. Soc. Am. **90** (1991), 1011-1018.

44. C.G. Don, *Application of a hard truncated wedge theory of diffraction to wide barriers*, J. Acoust. Soc. Am. **90** (1991), 1005-1010.
45. D. Chu, *Impulse response of density contrast wedge using normal coordinates*, J. Acoust. Soc. Am. **86** (1989), 1883-1896.
46. G.B. Deane and C.T. Tindle, *A three-dimensional analysis of acoustic propagation in a penetrable wedge slice*, J. Acoust. Soc. Am. **92** (1992), 1583-1592.
47. E.K. Westwood, *Broadband modeling of the three-dimensional penetrable wedge*, J. Acoust. Soc. Am. **92** (1992), 2212-2222.
48. D.S. Jones, *Methods in Electromagnetic Wave Propagation*, p. 718, Clarendon Press, Oxford, 1979.
49. D.S. Jones, *Acoustic and Electromagnetic Waves*, pp. 585-590, Clarendon Press, Oxford, 1986.
50. W.R. Smythe, *Static and Dynamic Electricity*, pp. 70-72, McGraw-Hill, New York, 1968.
51. K. Atkinson, *The Numerical Solution of Laplace's Equation on a Wedge*, IMA J. Num. Anal. **4** (1984), 19-41.
52. L.C. Andrews and B.K. Shivamoggi, *Integral Transforms for Engineers and Applied Mathematicians*, pp. 245-273, Macmillan, New York, 1988.
53. N.N. Lebedev, I.P. Skalskaya, and Y.S. Uflyand, *Worked Problems in Applied Mathematics*, p. 192, Dover, New York, 1965.
54. B. Davies, *Integral Transforms and Their Applications*, pp. 195-213, Springer-Verlag, New York, 1985.
55. J. Van Bladel, *Singular Electromagnetic Fields and Sources*, pp. 149-154, Clarendon Press, Oxford, 1991.
56. User's Manual, *IMSL Math/Library: Fortran Subroutines for Mathematical Applications*, pp. 767-769, IMSL Customer Relations, Houston, TX, 1989.
57. A.M.J. Davis and R.W. Scharstein, *Electromagnetic Plane Wave Excitation of an Open-Ended, Finite-Length Conducting Cylinder*, J. Electromagn. Waves Applications **7** (1993), 301-319.
58. R.W. Scharstein, *Acoustic scattering by an open-ended hard circular tube of finite length*, J. Acoust. Soc. Am. **92** (1992), 3337-3342.
59. D. Colton and R. Kress, *Integral Equation Methods in Scattering Theory*, Wiley, New York, 1983.
60. Se-Yun Kim, *Diffraction Coefficients and Field Patterns of Obtuse Angle Dielectric Wedge Illuminated by E-Polarized Plane Wave*, IEEE Trans. Antennas Propagat. **40** (1992), 1427-1431.
61. R.W. Scharstein, *Acoustic or Electromagnetic Scattering from the Penetrable Wedge*, BER Report No. 583-162, Naval Research Laboratory - Stennis Space Center Contract No. N00014-92-C-6004, The University of Alabama, Tuscaloosa, AL, 1993.
62. R.W. Scharstein, *Mellin Transform Solution for the Static Line-Source Excitation of a Dielectric Wedge*, IEEE Trans. Antennas Propagat. **41** (1993), 1675-1679.
63. M.E. Ermutlu, I.V. Lindell, and K.I. Nikoskinen, *Two-dimensional Image Theory for the Conducting Wedge*, Technical Report (1992), Helsinki University of Technology, Electromagnetics Laboratory, Espoo, Finland.
64. G.B. Deane and M.J. Buckingham, *An analysis of the three-dimensional sound field in a penetrable wedge with a stratified fluid or elastic basement*, J. Acoust. Soc. Am. **93** (1993), 1319-1328.
65. L.B. Felsen and N. Marcuvitz, *Radiation and Scattering of Waves*, pp. 674-675, Prentice-Hall, Englewood Cliffs, NJ, 1973.
66. L.B. Felsen, *Electromagnetic Properties of Wedge and Cone Surfaces with a Linearly Varying Surface Impedance*, IRE Trans. Antennas Propagat. **7** (1959), S231-S243.
67. N. Latz, *Electromagnetic Diffraction by Imperfectly Dielectric Wedges*, J. Math. Anal. Appl. **43** (1973), 373-387.
68. E.E.S. Sampaio and J.T. Fokkema, *Scattering of Monochromatic Acoustic and Electromagnetic Plane Waves by Two Quarter Spaces*, J. Geophys. Res. **97** (1992), 1953-1963.
69. V. Rokhlin, *Rapid Solution of Integral Equations of Scattering Theory in Two Dimensions*, J. Comput. Phys. **86** (1990), 414-439.
70. C. Bergljung and S. Berntsen, *Diffraction of an E-polarized Plane Wave by Two Right-angle Dielectric Wedges with Common Edge*, J. Electromagn. Waves Applic. (in review).

Single Surface Integral Equation for Penetrable Wedge Scattering.

Anthony M. J. Davis (Mathematics Department, University of Alabama, Tuscaloosa, AL 35487-0350) and Robert W. Scharstein (Electrical Engineering Department, University of Alabama, Tuscaloosa, AL 35487-0286)

The transmission problem of time-harmonic acoustic scattering by the velocity/density contrast wedge is formulated, through symmetry arguments and with the construction of suitable Green's functions, as a pair of uncoupled surface integral equations, each with one unknown function defined on a single wedge face. The convergent solution to the Fredholm integral equation of the first kind is expressed as a Galerkin series of Laguerre polynomials, and the development takes account of the distant behavior anticipated from the asymptotic solution to the related Sommerfeld half-space problem. The required inner products for the Galerkin projection scheme, which are integrals of products of the weighted Laguerre polynomials and the pair of Green's functions for the separate homogeneous regions, are written as Taylor series coefficients of an auxiliary function. Efficient numerical implementation of the physically-based analysis produces an accurate and intuitive picture of the wave interactions with this canonical scatterer. [Work supported by the Naval Research Laboratory - Stennis Space Center.]

Number of words: 160

Technical area: Underwater Acoustics

(PACS) Subject classification: 43.20.Fn

Send notice to: Robert W. Scharstein, phone (205) 348-1761
fax (205) 348-6959

e-mail rscharst@ualvm.ua.edu

Method of presentation: Lecture only

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or Special
A-1	

Mellin Transform Solution for the Static Line-Source Excitation of a Dielectric Wedge

Robert W. Scharstein, *Member, IEEE*

Abstract—An integral transform analysis of the static scattering of the two-dimensional potential radiated by a line source in the vicinity of a penetrable wedge is presented. The Mellin transform is used to derive the exact static solution to Laplace's equation for the dielectric wedge, in the form of a modal series. The important dielectric edge condition behavior is explicitly contained in this analytic solution.

I. INTRODUCTION

THE static solution is a critical component of any dynamic scattering problem, especially with regard to edge conditions and behavior in source regions. A quasi-static philosophy of extracting the dominant behavior of a solution to the Helmholtz equation $(\nabla^2 + k^2)\psi(r) = 0$ from the static ($k = 0$) solution to Laplace's equation $\nabla^2\psi(r) = 0$ in the neighborhood of boundary discontinuities and sources is well known and successful [1]–[4], and is naturally advocated by Anderson and Solodukhov [5] for the dielectric wedge. The important edge behavior of the *dynamic* fields in the immediate vicinity of the apex $r = 0$ is obtained from the *static* analysis, since all physical dimensions are scaled by the wavelength, and $k\tau \rightarrow 0$ is the limit of interest. The numerical results of Marx [6] indicate that the dynamic-field behavior at the apex of the dielectric wedge can differ from the static solution. However, continued mathematical analysis of the wave problem is required before initiating a comprehensive physical interpretation.

This paper presents the complete and exact solution to the static dielectric wedge problem. It should be noted that the special case with the line source lying on the x axis (the wedge bisector) does appear in the Russian text [7]. Furthermore, Smythe [8] presents a formal treatment of the static dielectric wedge, which is unfortunately flawed with divergent integral representations. In any event, the exact static solution is now available for this canonical geometry. The potential problem is solved using the Mellin transform, which is itself the static limit of the Kontorovich-Lebedev transform employed by Jones [9]

for the scattering of time-harmonic waves from impenetrable wedges having Dirichlet and Neumann boundary conditions. The static modes of [5] appear as the residues in the Mellin inversion integral.

II. STATEMENT OF THE BOUNDARY-VALUE PROBLEM

The static excitation of the penetrable wedge is due to the line charge of unit lineal density, located at the source coordinates (r', ϕ') of Fig. 1. The permittivity of the wedge of angle 2α is ϵ_2 , which is surrounded by a medium with permittivity ϵ_1 . All geometry and therefore all resultant fields are of infinite extent and invariant in the z dimension, which restricts the physical domain to \mathbb{R}^2 .

The irrotational electrostatic field is uniquely characterized by the scalar potential $\psi(r)$, which is a solution of Poisson's equation subject to appropriate boundary conditions. Denote by $\psi_1(r)$ the potential field in the external region where the source is

$$\nabla^2\psi_1(r, \phi) = -\frac{1}{\epsilon_1 r} \delta(r - r') \delta(\phi - \phi') \quad (\alpha \leq \phi \leq 2\pi - \alpha), \quad (1)$$

and let $\psi_2(r)$ be the source-free field inside the wedge

$$\nabla^2\psi_2(r, \phi) = 0 \quad (-\alpha \leq \phi \leq \alpha). \quad (2)$$

Boundary conditions at the material interfaces $\phi = \pm\alpha$ for this scalar potential are continuity of ψ (from continuity of the tangential electric field) and continuity of the normal electric flux density $\epsilon_j \partial\psi_j / \partial n$ (absence of any free surface charge).

In order to simplify the ensuing analysis, it is expedient to decompose the desired solution $\psi(x, y)$ for the boundary-value problem of Fig. 1 into its odd $\psi^o(x, y)$ and even $\psi^e(x, y)$ components

$$\psi(x, \pm y) = \frac{1}{2} [\psi^e(x, y) \pm \psi^o(x, y)] \quad (y \geq 0) \quad (3)$$

with respect to the x axis which bisects the wedge. Since $\psi^o(x, y)$ is an odd function of y , it vanishes on the $y = 0$ plane and is therefore the solution in the upper half-space $y \geq 0$ for the problem having a soft bisecting plane (Dirichlet boundary condition). This is equivalent to an out-of-phase image source. Similarly, $\psi^e(x, y)$ is the solu-

Manuscript received March 25, 1993; revised July 31, 1993. This research was sponsored by the Naval Research Laboratory–Stennis Space Center, MS, under Contract No. N00014-92-C-6004.

The author is with the Department of Electrical Engineering, The University of Alabama, 317 Houser Hall, Box 870286, Tuscaloosa, AL 35487-0286.

IEEE Log Number 9214090.




Fig. 1. Dielectric wedge and static line charge.




Fig. 2. Odd and even symmetry components.

tion for the hard bisecting plane (Neumann boundary condition), which sustains an in-phase image source. This symmetry is depicted in Fig. 2.

III. MATHEMATICAL ANALYSIS

A. Mellin Transform for the Case of Odd Symmetry

The source coordinate $\phi = \phi'$ divides region (1) into two source-free regions, resulting in a total of three subregions to consider for the half-space above the perfectly soft plane:

$$\psi^o(x, y) = \begin{cases} \psi_2(r, \phi), & 0 \leq \phi \leq \alpha \\ \psi_1^-(r, \phi), & \alpha < \phi \leq \phi' \\ \psi_1^+(r, \phi), & \phi' < \phi \leq \pi. \end{cases} \quad (4)$$

The Dirichlet boundary condition on the soft plane is

$$\psi_2(r, 0) = 0 \quad (5)$$

$$\psi_1^+(r, \pi) = 0 \quad (6)$$

and at the material interface

$$\psi_2(r, \alpha) = \psi_1^-(r, \alpha) \quad (7)$$

$$\epsilon_2 \frac{\partial}{\partial \phi} \psi_2(r, \alpha) = \epsilon_1 \frac{\partial}{\partial \phi} \psi_1^-(r, \alpha). \quad (8)$$

Consistent with the conventional Green's function ansatz, the potential is continuous everywhere across the source plane $\phi = \phi'$

$$\psi_1^-(r, \phi') = \psi_1^+(r, \phi'), \quad (9)$$

while the discontinuity in normal derivative

$$\frac{\partial}{\partial \phi} \psi_1^-(r, \phi') - \frac{\partial}{\partial \phi} \psi_1^+(r, \phi') = \frac{r}{\epsilon_1} \delta(r - r') \quad (10)$$

results from integrating (1) from $\phi' -$ to $\phi' +$.

The Mellin transform [10] is used to transform the radial variable r to a complex variable s , whereupon the remaining differential equation with boundary conditions in ϕ is solved in closed form. The physical solution $\psi(r, \phi)$ is recovered by careful evaluation of the inverse Mellin transform. The Mellin transform of $f(r)$ is

$$F(s) = \mathcal{M}\{f(r); s\} = \int_0^\infty r^{s-1} f(r) dr, \quad (11)$$

and has

$$f(r) = \mathcal{M}^{-1}\{F(s); r\} = \frac{1}{2\pi i} \int_{c-i\infty}^{c+i\infty} r^{-s} F(s) ds \quad (12)$$

as its inversion formula. If $r^{a-1}f(r)$ is absolutely integrable on the positive real axis for some $a > 0$, then the inversion is valid for $c > a$.

The Mellin transform of the product of r^2 and Poisson's equation (1)

$$\left(r^2 \frac{\partial^2}{\partial r^2} + r \frac{\partial}{\partial r} + \frac{\partial^2}{\partial \phi^2} \right) \psi_1(r, \phi) = -\frac{r}{\epsilon_1} \delta(r - r') \delta(\phi - \phi') \quad (13)$$

is the simple form

$$\left(s^2 + \frac{\partial^2}{\partial \phi^2} \right) \Psi_1(s, \phi) = -\frac{r'^s}{\epsilon_1} \delta(\phi - \phi'). \quad (14)$$

This fortunate property of the Mellin transform of the r dependence in the two-dimensional Laplacian is responsible for its successful application [7], [10], [11] to potential problems in wedge-shaped regions. In region (2) where there is no forcing term, this procedure gives

$$\left(s^2 + \frac{\partial^2}{\partial \phi^2} \right) \Psi_2(s, \phi) = 0. \quad (15)$$

The complex variable s is a parameter in the above pair of ordinary differential equations in ϕ , with solutions

$$\Psi_2(s, \phi) = A(s) \sin(s\phi) \quad (0 \leq \phi \leq \alpha) \quad (16)$$

$$\Psi_1^-(s, \phi) = B(s) \sin(s\phi) + C(s) \cos(s\phi) \quad (\alpha < \phi \leq \phi') \quad (17)$$

$$\Psi_1^+(s, \phi) = D(s) \sin[s(\phi - \pi)] \quad (\phi' < \phi \leq \pi) \quad (18)$$

in view of the soft boundary conditions (5) and (6). Transformation of the four remaining conditions (7)–(10) gives the set of simultaneous equations

$$\begin{bmatrix} -\sin(s\alpha) & \sin(s\alpha) & \cos(s\alpha) & 0 \\ \frac{\epsilon_2}{\epsilon_1} \cos(s\alpha) & -\cos(s\alpha) & \sin(s\alpha) & 0 \\ 0 & \sin(s\phi') & \cos(s\phi') & \sin[s(\pi - \phi')] \\ 0 & \cos(s\phi') & -\sin(s\phi') & -\cos[s(\pi - \phi')] \end{bmatrix} \begin{bmatrix} A(s) \\ B(s) \\ C(s) \\ D(s) \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ \frac{r'^s}{\epsilon_1 s} \end{bmatrix} \quad (19)$$

to be solved for the coefficient functions in (16)–(18). Solution of these yields the (soft) Mellin transforms

$$\Psi_2(s, \phi) = \frac{1 - \Gamma}{\epsilon_1} \frac{r'^s}{s} \sin[s(\pi - \phi')] \sin(s\phi) / \Delta_o(s) \quad (0 \leq \phi \leq \alpha) \quad (20)$$

$$\Psi_1^-(s, \phi) = \frac{r'^s}{\epsilon_1 s} \sin[s(\pi - \phi')] \{ \sin(s\phi) + \Gamma \sin[s(\phi - 2\alpha)] \} / \Delta_o(s) \quad (\alpha < \phi \leq \phi') \quad (21)$$

$$\Psi_1^+(s, \phi) = \frac{r'^s}{\epsilon_1 s} \sin[s(\pi - \phi)] \{ \sin(s\phi') + \Gamma \sin[s(\phi' - 2\alpha)] \} / \Delta_o(s) \quad (\phi' < \phi \leq \pi) \quad (22)$$

with denominator function

$$\Delta_o(s) = \sin(s\pi) + \Gamma \sin[s(\pi - 2\alpha)], \quad (23)$$

and dielectric contrast parameter

$$\Gamma = \frac{\epsilon_2 - \epsilon_1}{\epsilon_2 + \epsilon_1}. \quad (24)$$

B. Modifications for the Case of Even Symmetry

In the case of a hard ground plane, the Neumann boundary conditions

$$\frac{\partial}{\partial \phi} \psi_2(r, 0) = 0 \quad (25)$$

$$\frac{\partial}{\partial \phi} \psi_1^+(r, \pi) = 0 \quad (26)$$

replace the Dirichlet boundary conditions (5) and (6) of the previous section. A similar application of the Mellin transform and the other unchanged boundary conditions yields the (hard) Mellin transforms

$$\Psi_2(s, \phi) = \frac{\Gamma - 1}{\epsilon_1} \frac{r'^s}{s} \cos[s(\pi - \phi')] \cos(s\phi) / \Delta_e(s) \quad (0 \leq \phi \leq \alpha) \quad (27)$$

$$\Psi_1^-(s, \phi) = \frac{r'^s}{\epsilon_1 s} \cos[s(\pi - \phi')] \{ \Gamma \cos[s(\phi - 2\alpha)] - \cos(s\phi) \} / \Delta_e(s), \quad (\alpha < \phi \leq \phi') \quad (28)$$

$$\Psi_1^+(s, \phi) = \frac{r'^s}{\epsilon_1 s} \cos[s(\pi - \phi)] \{ \Gamma \cos[s(\phi' - 2\alpha)] - \cos(s\phi') \} / \Delta_e(s) \quad (\phi' < \phi \leq \pi) \quad (29)$$

where in this case the denominator function is

$$\Delta_e(s) = \sin(s\pi) - \Gamma \sin[s(\pi - 2\alpha)]. \quad (30)$$

Note that, except for the simple scaling by ϵ_1 which persists from the original source strength chosen in (1),

the presence of two different dielectrics is entirely accounted for by Γ in all of the above transforms.

C. Inverse Mellin Transforms—Preliminaries

The zeros of the denominator functions (23) and (30)

$$\Delta(s) = \sin(s\pi) \pm \Gamma \sin[s(\pi - 2\alpha)] \quad \left\{ \begin{array}{l} \text{soft} \\ \text{hard} \end{array} \right\} \quad (31)$$

are central to the Mellin inversion (12). These real, simple zeros can be computed via Muller's algorithm [12] for arbitrary half-angle α , or solved analytically as the roots of a trigonometric polynomial when α is a rational multiple of π . This procedure is demonstrated for the particular case $\alpha = \pi/3$, whereupon the variable change $u = s\pi/3$ in (31) gives

$$\sin(3u) \pm \Gamma \sin(u) = 0 \quad (32)$$

which factors into

$$[3 \pm \Gamma - 4 \sin^2(u)] \sin(u) = 0. \quad (33)$$

The required roots are now explicitly given by

$$s_n = \left\{ \begin{array}{l} \frac{3}{\pi} \sin^{-1} \sqrt{\frac{3 \pm \Gamma}{4}} \\ -\frac{3}{\pi} \sin^{-1} \sqrt{\frac{3 \pm \Gamma}{4}} \\ 0 \end{array} \right\} + 3m \quad (m = 0, \pm 1, \pm 1, \dots), \quad (34)$$


where it is recalled that the $+\Gamma$ ($-\Gamma$) denotes the case of soft (hard) symmetry. The effect of the dielectric material ($\epsilon_2 \neq \epsilon_1 \Rightarrow \Gamma \neq 0$) on the potential above both symmetry planes is a regular displacement of the integer poles for the homogeneous case ($\epsilon_2 = \epsilon_1 \Rightarrow \Gamma = 0$). The index n in (34) is a denumerable ordering of these poles.

D. Inverse Mellin Transform for the Case of Odd Symmetry

As $r \rightarrow 0$ the odd potential $\psi^o \rightarrow 0$ and the dipole behavior $\psi^o \sim 1/r$ prevails as $r \rightarrow \infty$ in the far field. A sufficient Bromwich contour for the complex integration (12) is therefore guaranteed for the choice of real constant $0 < c < 1$. Complete details of the Mellin inversion for the potential $\psi_2(r, \phi)$ of (4) inside the dielectric sector are provided, whereupon the final forms for $\psi_1^-(r, \phi)$ and $\psi_1^+(r, \phi)$ are immediately written by comparison.

The $\sin(s\phi)$ factor in $\Psi_2(s, \phi)$ of (20) together with the transform property [10]

$$\mathcal{M}^{-1} \{ \sin(s\phi) F(s); s \} = -\mathcal{J} [f(re^{i\phi})] \quad (35)$$

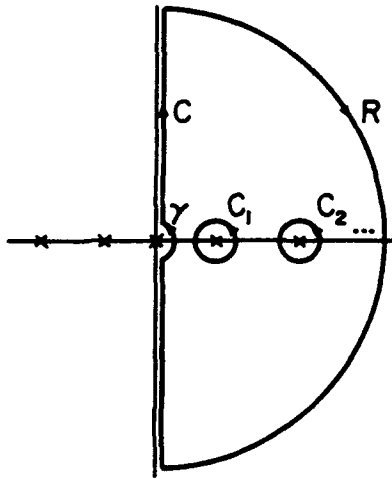Fig. 3. Bromwich contour in the complex s plane.

renders

$$f(r) = \frac{1}{2\pi i} \int_{-i\infty}^{i\infty} \frac{\sin[s(\pi - \phi')](r'/r)^s}{\underbrace{s\{\sin(s\pi) + \Gamma \sin[s(\pi - 2\alpha)]\}}_{G(s)}} ds \quad (36)$$

the desired function. The integration path in (36) has been pushed flush against the imaginary axis, and the principal value notation invoked to properly account for the pole at the origin. For $r > r'$, closure at infinity in the right half-plane gives a convenient contour on which to apply Cauchy's integral theorem, and is shown in Fig. 3. Let C_n be a circle of vanishing radius $\rho \rightarrow 0$, centered on the pole s_n with residue

$$\lim_{\rho \rightarrow 0} \frac{1}{2\pi i} \oint_{C_n} G(s) ds = \frac{\sin[s_n(\pi - \phi')](r'/r)^{s_n}}{s_n \Delta'_o(s_n)}, \quad (37)$$

where the derivative of the soft denominator function is

$$\Delta'_o(s_n) = \pi \cos(s_n \pi) + (\pi - 2\alpha)\Gamma \cos[s_n(\pi - 2\alpha)]. \quad (38)$$

The integral around the origin

$$\lim_{\rho \rightarrow 0} \frac{1}{2\pi i} \oint_{C_0} G(s) ds = \frac{\pi - \phi'}{\Delta'_o(0)} \quad (39)$$

follows from the limit $s_n \rightarrow 0$. Let positive $n = 1, 2, \dots$ be the indices of the poles in the right half-plane, and let negative $n = -1, -2, \dots$ identify the poles in the left half-plane. The odd symmetry of the function $\Delta_o(s)$ provides

$$s_{-n} = -s_n \text{ and } \Delta'_o(-s_n) = \Delta'_o(s_n). \quad (40)$$

The contribution from the integral around the infinite semi-circle R of Fig. 3 is zero for $r > r'$, while closure of the contour in the left half-plane is appropriate when $r < r'$. Cauchy's integral theorem now yields

$$f(r) = \pm \left\{ \frac{\pi - \phi'}{2\Delta'_o(0)} + \sum_{n=1}^{\infty} \frac{\sin[s_n(\pi - \phi')]}{s_n \Delta'_o(s_n)} (r/r')^{\pm s_n} \right\}$$

$$(r \leq r'), \quad (41)$$

which together with (35) gives

$$\psi_2(r, \phi) = \frac{\Gamma - 1}{\epsilon_1} \cdot \sum_{n=1}^{\infty} \frac{\sin[s_n(\pi - \phi')]\sin(s_n \phi)}{s_n \Delta'_o(s_n)} (r/r')^{\pm s_n} \quad (r \leq r') \text{ for the sector } 0 \leq \phi \leq \alpha \quad (42)$$

as the inverse Mellin transform of (20). Since all three of the transforms (20)–(22) are of the same general form, the remaining two field expressions are evidently

$$\psi_1^-(r, \phi) = \frac{-1}{\epsilon_1} \sum_{n=1}^{\infty} \frac{\sin[s_n(\pi - \phi')]}{2s_n \Delta'_o(s_n)} (r/r')^{\pm s_n} \cdot \{\sin(s_n \phi) + \Gamma \sin[s_n(\phi - 2\alpha)]\} \quad (r \leq r') \text{ for the sector } \alpha < \phi \leq \phi' \quad (43)$$

and

$$\psi_1^+(r, \phi) = \frac{-1}{\epsilon_1} \sum_{n=1}^{\infty} \frac{\sin[s_n(\pi - \phi)]}{s_n \Delta'_o(s_n)} (r/r')^{\pm s_n} \cdot \{\sin(s_n \phi') + \Gamma \sin[s_n(\phi' - 2\alpha)]\} \quad (r \leq r') \text{ for the sector } \phi' < \phi \leq \pi. \quad (44)$$

Note the reciprocity in the last two expressions for $\phi \leftrightarrow \phi'$. The above reduce to the correct potential due to a unit line charge located at $\phi' = \pi/2$ above a soft ground plane in the special case of no dielectric wedge ($\epsilon_2 = \epsilon_1$).

E. Inverse Mellin Transform for the Case of Even Symmetry

The monopole potential $\ln r$ due to the original line source and the in-phase image is the dominant feature of ψ^e in the far field as $r \rightarrow \infty$. Therefore, the condition of integrability following the transform pair of (11) and (12) is not satisfied, and the Mellin inversion formula cannot be directly applied to the functions in (27)–(29). Mathematically, operating with the ϕ derivative of the potential temporarily removes this troublesome logarithmic variation, which is then restored following the convergent Mellin inversion.

The ϕ derivative of (27)

$$\frac{\partial}{\partial \phi} \Psi_2(s, \phi) = \frac{1 - \Gamma \cos[s(\pi - \phi')]\sin(s\phi)}{\epsilon_1 \Delta_e(s)} r^s \quad (45)$$

is transformed in the manner of the previous section to

$$\frac{\partial}{\partial \phi} \psi_2(r, \phi) = \frac{\Gamma - 1}{\epsilon_1} \cdot \sum_{n=1}^{\infty} \frac{\cos[s_n(\pi - \phi')]\sin(s_n \phi)}{\Delta_e(s_n)} (r/r')^{\pm s_n} \quad (r \leq r'), \quad (46)$$

where the s_n are now the hard poles in (34) and $-\Gamma$ replaces Γ in (38) for this hard denominator function (31).

The antiderivative with respect to ϕ yields

$$\psi_2(r, \phi) = \frac{1 - \Gamma}{\epsilon_1} \sum_{n=1}^{\infty} \frac{\cos[s_n(\pi - \phi')]\cos(s_n\phi)}{s_n\Delta'_e(s_n)} (r/r')^{\pm s_n} \quad (r \leq r') \quad \text{for the sector } 0 \leq \phi \leq \alpha, \quad (47)$$

where the boundedness at $r = 0$ and the known behavior at $r \rightarrow \infty$ specify

$$w_{\mp}(r) = \begin{cases} 0, & \text{for } r < r' \\ -\frac{1}{\pi\epsilon_1} \ln(r/r'), & \text{for } r > r' \end{cases} \quad (48)$$

as the ϕ -independent term in this solution of Laplace's equation. Similarly, the spatial potentials from the related transforms (28) and (29) are thus

$$\psi_1^-(r, \phi) = W_{\mp}(r) - \frac{1}{\epsilon_1} \sum_{n=1}^{\infty} \frac{\cos[s_n(\pi - \phi')]}{s_n\Delta'_e(s_n)} (r/r')^{\pm s_n} \cdot \{\Gamma \cos[s_n(\phi - 2\alpha)] - \cos(s_n\phi)\} \quad (r \leq r') \quad \text{for the sector } \alpha < \phi \leq \phi' \quad (49)$$

and

$$\psi_1^+(r, \phi) = w_{\mp}(r) - \frac{1}{\epsilon_1} \sum_{n=1}^{\infty} \frac{\cos[s_n(\pi - \phi)]}{s_n\Delta'_e(s_n)} (r/r')^{\pm s_n} \cdot \{\Gamma \cos[s_n(\phi' - 2\alpha)] - \cos(s_n\phi')\} \quad (r \leq r') \quad \text{for the sector } \phi' < \phi \leq \pi. \quad (50)$$

These results are also verified for the special case of a unit line charge located at $\phi' = \pi/2$ in a homogeneous half-space ($\epsilon_2 = \epsilon_1$) above the hard symmetry plane.

IV. RESULTS FOR THE COMPLETE STATIC SOLUTION

Contours of constant potential are illustrated in Fig. 4 for the case of wedge half-angle $\alpha = \pi/3$. Even and odd potentials are computed for the separate boundary-value problems and combined according to (3). The line source is located a unit distance ($r' = 1$) from the wedge apex at the (x, y) coordinate origin. The domain of Fig. 4 is all internal to the unit circle. Note that in this static problem with material boundaries at $\phi = \pm\alpha$, the source distance r' is the single length scale. As ϵ_2/ϵ_1 gets large, the dielectric wedge becomes essentially an equipotential region, which is expected since an increasingly dense dielectric ($\epsilon_2 \rightarrow \infty$) behaves electrically like a perfect conductor. As $r \rightarrow 0$, the dominant behavior of the scalar potential is given by the first terms of the modal series (42)–(44) and (47)–(50), as pointed out by Anderson and Solodukhov [5] and tabulated in the recent text by Van Bladel [13].

V. CONCLUSIONS

The exact, modal series solution of Laplace's equation for the static field inside and outside of the dielectric wedge is obtained via the Mellin transform, and is readily evaluated. This analytic solution is a useful benchmark with which to check any numerical and approximate methods that are applied to the static problem.

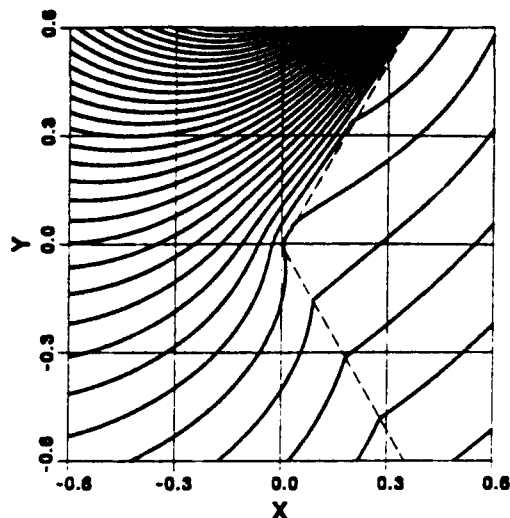


Fig. 4. Contours of constant potential for the dielectric wedge. Case: $r' = 1$, $\phi' = \pi/2$, $\alpha = \pi/3$, $\epsilon_1 = 1$, $\epsilon_2 = 10$.

REFERENCES

- [1] L. Lewin, *Theory of Waveguides*. London: Halsted Press, 1975, p. 266.
- [2] C. M. Butler, "General solutions of the narrow strip and slot integral equations," *IEEE Trans. Antennas Propagat.*, vol. AP-33, pp. 1085–1090, 1985.
- [3] R. W. Scharstein, "Two numerical solutions for the parallel plate-fed slot antenna," *IEEE Trans. Antennas Propagat.*, vol. AP-37, pp. 1415–1426, 1989.
- [4] A. M. J. Davis and R. W. Scharstein, "Electromagnetic plane wave excitation of an open-ended, finite-length conducting cylinder," *J. Electromagn. Waves Appl.*, vol. 7, pp. 301–319, 1993.
- [5] J. Bach Andersen and V. V. Solodukhov, "Field behavior near a dielectric wedge," *IEEE Trans. Antennas Propagat.*, vol. AP-26, pp. 598–602, 1978.
- [6] E. Marx, "Computed fields near the edge of a dielectric wedge," *IEEE Trans. Antennas Propagat.*, vol. AP-38, pp. 1438–1442, 1990.
- [7] N. N. Lebedev, I. P. Skalskaya, and Y. S. Uflyand, *Worked Problems in Applied Mathematics*. New York: Dover, 1965, p. 192.
- [8] W. R. Smythe, *Static and Dynamic Electricity*. (3rd Ed.) New York: McGraw-Hill, 1968, pp. 70–72.
- [9] D. S. Jones, *Acoustic and Electromagnetic Waves*. Oxford: Clarendon Press, 1986, pp. 585–590.
- [10] L. C. Andrews and B. K. Shivamoggi, *Integral Transforms for Engineers and Applied Mathematicians*. New York: Macmillan, 1988, pp. 245–273.
- [11] B. Davies, *Integral Transforms and Their Applications*. New York: Springer-Verlag, 1985, pp. 195–213.
- [12] *User's Manual, IMSL Math/Library: Fortran Subroutines for Mathematical Applications*. Houston, TX: IMSL Customer Relations, 1989, pp. 767–769.
- [13] J. Van Bladel, *Singular Electromagnetic Fields and Sources*. Oxford: Clarendon Press, 1991, pp. 149–154.



Robert W. Scharstein was born in Covington, KY in 1955. He received the B.S. degree from the State University of New York at Buffalo in 1978, and the M.S. and Ph.D. degrees from Syracuse University, in 1981 and 1986, respectively.

He was an Engineer with the General Electric Company, Assistant Professor with Clemson University, and Senior Engineer with the Sensis Corporation. Since 1989 he has been an Assistant Professor of Electrical Engineering at the

University of Alabama with research and interests in wave scattering and herpetology.